

# ProCapture-T

## Fingerprint Access Control Terminal



**ProCapture-T** is an access control terminal applying the most advanced SilkID fingerprint sensor. Its outstanding performance provides a high identification rate towards dry, wet and rough fingers, being capable to detect alive finger for a higher security level.

The fingerprint verification speed has been dramatically increased by its optimized fingerprint algorithm and the brand new ZMM220 hardware platform, equipped with a fast 1.2GHz processor.

The touch keypad delivers a smooth and easy user operation to enroll and delete users, set device and access control parameters, etc.

Its built-in camera allows to capture user's photos and events snapshots to provide attendance evidence (optional function).

## Features



Modern Design & Interactive UI



Revolutionary SilkID Fingerprint Sensor






Multiple Verification Modes:  
Fingerprint / Card / Password



Outstanding Performance With  
Dry, Wet and Rough Fingers



Built In Camera  
\* Event Snapshot  
\* User Photo (Optional)

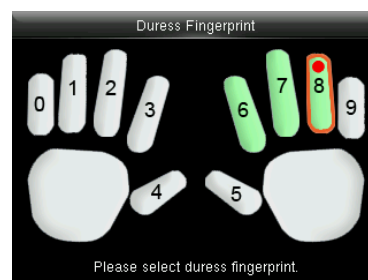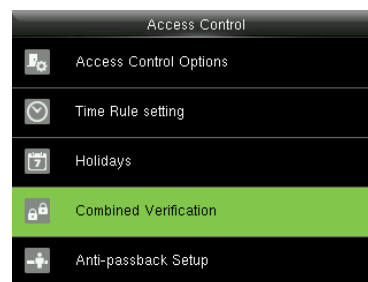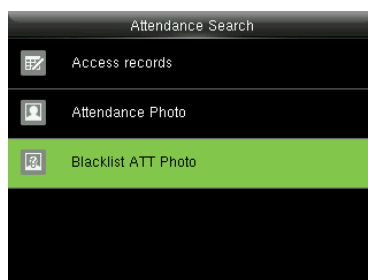



## Specifications GL Exclusive Feature

### Capacity

Fingerprint	6,000
Card	10,000
Transaction	100,000
User Photo	3,000
Event Photo	7,000

### Communication

-  TCP/IP
-  RS485 (For Slave Reader)
- USB Host
- Wiegand Input / Output
- Security Relay Box

### Access Control Interface

- Lock Relay Output
- Alarm Output / Auxiliary Input
- Exit Button / Door Sensor
- Doorbell Output




### Hardware

-  1.2GHz Dual Core CPU
-  Memory 128MB RAM / 256MB Flash
- SilkID Fingerprint Sensor
- 2.4 Inches TFT-LCD Screen
- 125KHz EM Reader / Mifare (Optional)
- Hi-Fi Voice & Indicator
- Tamper Switch Alarm
-  Touch Keypad
-  120° Wide Angle Camera


### Standard Functions

- Access Levels / Groups / Holidays
- DST / Bell Schedule
- Duress Mode
- Anti-Passback
- Record Query
- Custom Wallpaper & Screen Saver

### Special Functions

-  Multiple Verification Modes
-  Alive Finger Detection
-  Event Snapshot
- User Photo (Optional)

### Compatibility

- Wiegand Slave Reader
-  RS485 FP Slave Reader
- ZKBioSecurity Software


### Additional Info

- Working Temperature: -10 °C ~ 50 °C
- Dimensions: 195.5 × 87 × 35 mm.
- Fingerprint Algorithm ZKFinger v10.0


### Power

- Operating Voltage 12V DC
- Current Draw < 500mA

## Configuration

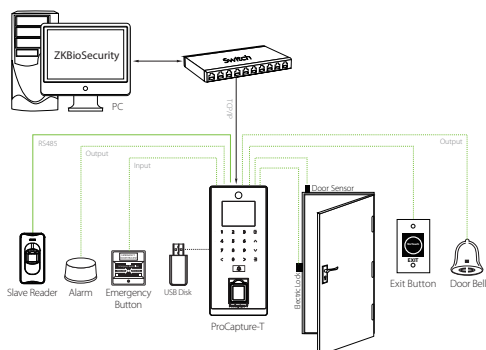

## Dimensions (mm)

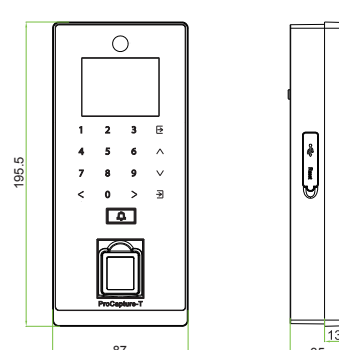

ZKTeco Inc.  
www.zkteco.com  
E-mail: sales@zkteco.com



© Copyright 2016, ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.